



ROOF PLAN

(305mm X 610mm)
12" X 24"
NOMINAL GRID

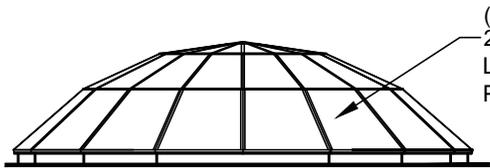


SIDE ELEVATION

(70mm)
2 3/4" INSULATED &
LIGHT TRANSMITTING
PANELS

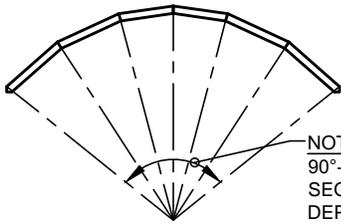


NOTE:
90°-180° TYP. ANGLE
SEGMENTED DOMES.
DEPENDENT UPON MIN. PITCH
REQUIREMENTS AND ANGULAR
BATTEN RANGE.

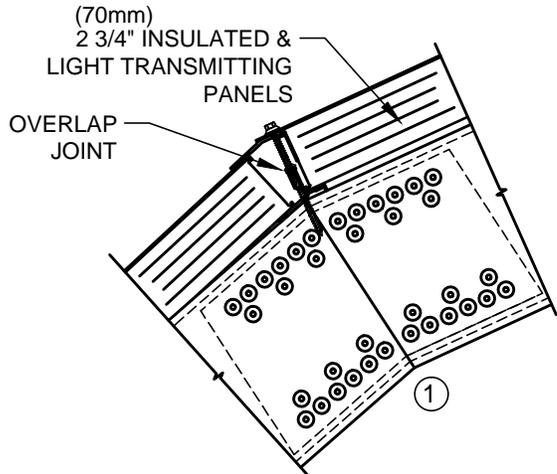

(70mm)
2 3/4" INSULATED &
LIGHT TRANSMITTING
PANELS

OVERLAP
JOINT

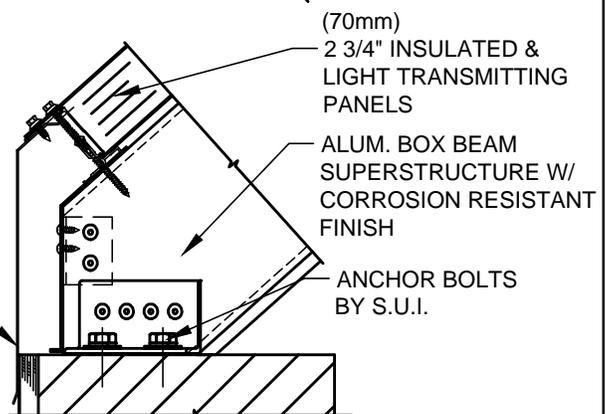


(70mm)
2 3/4" INSULATED &
LIGHT TRANSMITTING
PANELS

ALUM. BOX BEAM
SUPERSTRUCTURE W/
CORROSION RESISTANT
FINISH

ANCHOR BOLTS
BY S.U.I.


ALUM. FLASHING
BY S.U.I.

CURB WIDTH
(MIN. REQUIREMENTS VARY)
(CONTACT FACTORY)

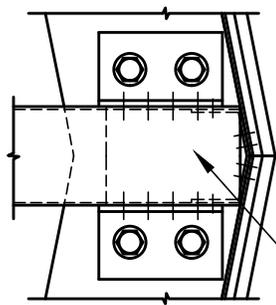

③

ALUM. BOX BEAM
SUPERSTRUCTURE W/
CORROSION RESISTANT
FINISH

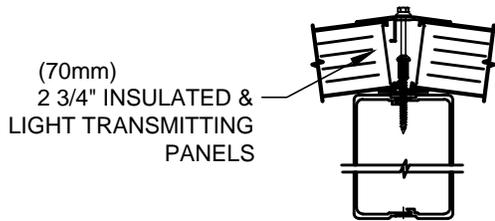

(70mm)
2 3/4" INSULATED &
LIGHT TRANSMITTING
PANELS

④