# 27.25° - 6'-0" PYRAMID

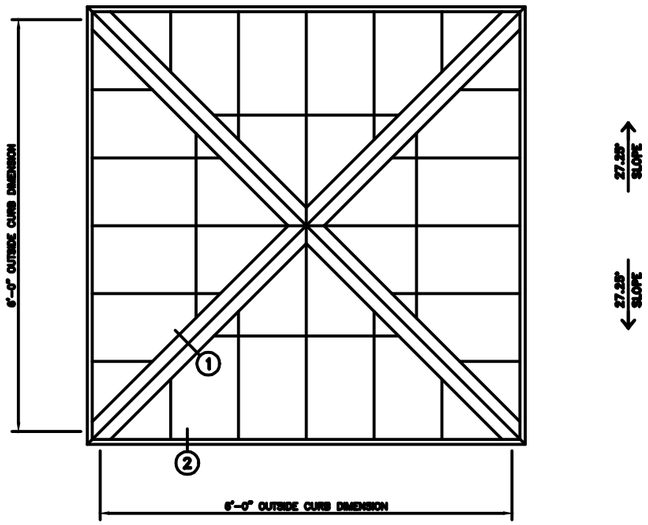


PYRAMID PLAN
NOTE: SHIPPED IN 1 UNIT

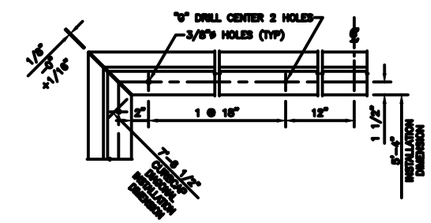


CURB CAP PLAN

| SUGGESTED FASTENING OF CURB CAP TO CURB | | |
|---|---|---|
| CURB TYPE | FASTENER * | SPACING |
| WOOD | #14 R.H. S.S. – 4" LG. | 24" O.C. |
| STEEL | #14 R.H. S.S. – 1" LG. | 24" O.C. |
| CONCRETE | 1/4" X 3 1/4" POWER STUD OR #7401 | 24" O.C. |

*NOT SUPPLIED BY KALWALL UNLESS INSTALLED BY KALWALL

ALL FASTENERS TO BE IN HOLE 1/8" LARGER THAN FASTENER DIA.
HOLE AT CENTER OF CURB TO BE SAME DIA. AS FASTENER

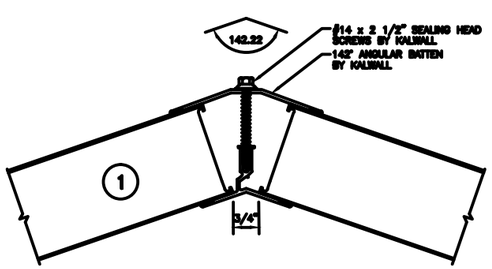


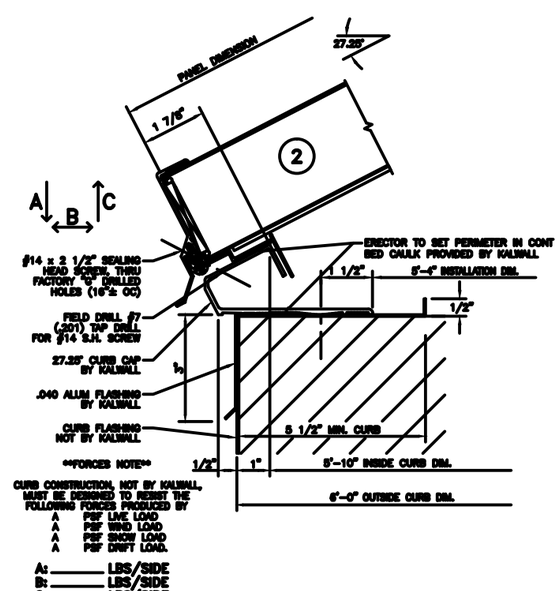


**FORCES NOTE**

CURB CONSTRUCTION, NOT BY KALWALL, MUST BE DESIGNED TO RESIST THE FOLLOWING FORCES PRODUCED BY

A PSF LIVE LOAD
A PSF WIND LOAD
A PSF SNOW LOAD
A PSF DRIFT LOAD.

A: _____ LBS/SIDE
B: _____ LBS/SIDE
C: _____ LBS/SIDE

KALWALL®
high performance translucent building systems